


Roof Report Prepared by Roofr

3821 Agateway Dr, Harvey, LA 70058, USA Jenniffer Williams 5049305238

2327 sqft 6 facets Predominant Pitch 4/12



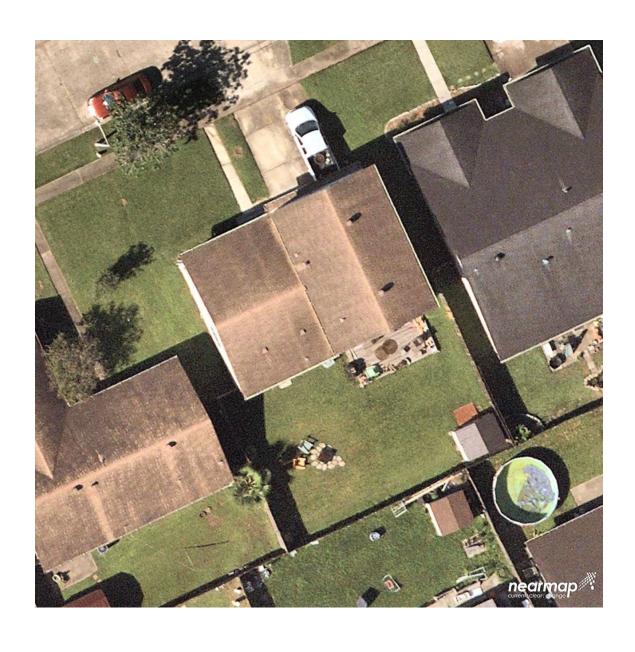

Building Location


3821 Agateway Dr, Harvey, LA 70058, USA





Diagram

3821 Agateway Dr, Harvey, LA 70058, USA

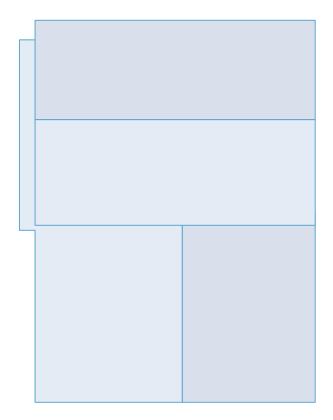







Length Measurement Report

3821 Agateway Dr, Harvey, LA 70058, USA

Eaves 167ft 7in

Ridges 72ft 0in

Step Flashing 38ft 5in

Valleys 0ft 0in


Rakes 126ft 6in

Transitions 0ft 0in

Hips Oft 0in

Wall Flashing 23ft 6in

Unspecified 0ft 0in

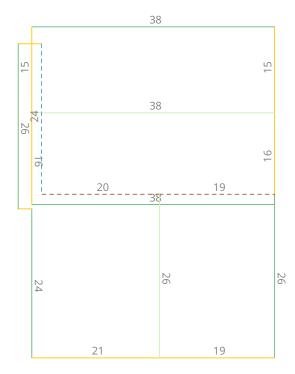





Area Measurement Report

3821 Agateway Dr, Harvey, LA 70058, USA


Total Low Pitch: 0 sqft Total Two Story: 0 sqft

Total Two Layer: 0 sqft

Predominant Pitch: (4/12)

Predominant Pitch Area: 2327 sqft

Total Area: 2327 sqft

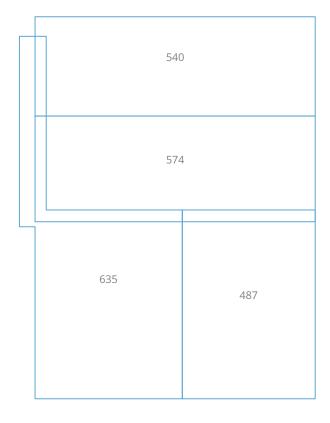

45 50





Pitch & Direction Measurement Report

3821 Agateway Dr, Harvey, LA 70058, USA

† 4
4 ↓
← 4






Note: Flashings are depicted as dotted lines. Deleted facets do not have a pitch and therefore are not labeled.



Structure #1 Summary

3821 Agateway Dr, Harvey, LA 70058, USA

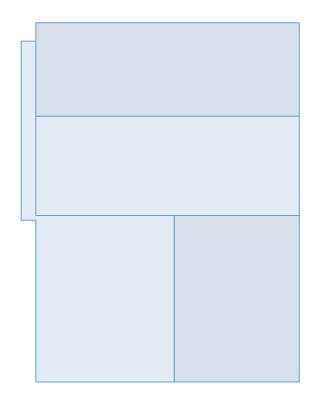

Measurements	
Total Roof Area	2234 sqft
Total Roof Facets	4 facets
Predominant Pitch	4/12
Total Eaves	150ft 6in
Total Valleys	Oft Oin
Total Hips	Oft Oin
Total Ridges	63ft 6in
Total Rakes	104ft 7in
Total Wall Flashing	23ft 6in
Total Step Flashing	38ft 5in
Total Transition	Oft Oin
Total Unspecified	Oft Oin
Hips + Ridges	63ft 6in
Eaves + Rakes	255ft 1in

Pitch	4/12						
Area (sqft)	2,234						
Squares	22.4						
Waste %	0%	10%	12%	15%	17%	20%	22%
Area (sqft)	2,234	2,458	2,503	2,570	2,614	2,681	2,726
Squares	22.4	24.6	25.1	25.7	26.2	26.9	27.3


We've calculated the waste percentages you might expect for this job. A number of factors are involved in determining which waste percentage to use including: how complex the roof is, and your roof application style. These numbers only include the roof area. You will also need to calculate the quantity of materials you will need for hips, valleys, ridges, and starter lengths. This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.



39ft 0in

Structure #2 Summary

3821 Agateway Dr, Harvey, LA 70058, USA

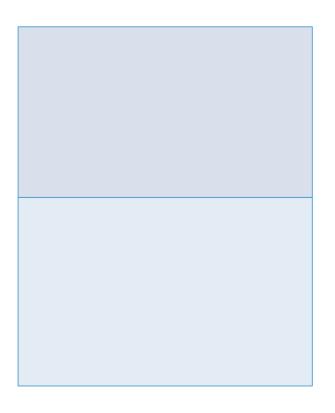

Measurements	
Total Roof Area	94 sqft
Total Roof Facets	2 facets
Predominant Pitch	4/12
Total Eaves	17ft 1in
Total Valleys	Oft Oin
Total Hips	Oft Oin
Total Ridges	8ft 6in
Total Rakes	21ft 11in
Total Wall Flashing	Oft Oin
Total Step Flashing	Oft Oin
Total Transition	Oft Oin
Total Unspecified	Oft Oin
Hips + Ridges	8ft 6in

Eaves + Rakes


Waste %	0%	10%	12%	15%	17%	20%	22%
Area (sqft)	94	104	106	109	110	113	115
Squares	1.0	1.1	1.1	1.1	1.1	1.2	1.2

We've calculated the waste percentages you might expect for this job. A number of factors are involved in determining which waste percentage to use including: how complex the roof is, and your roof application style. These numbers only include the roof area. You will also need to calculate the quantity of materials you will need for hips, valleys, ridges, and starter lengths. This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.



All Structures Summary

3821 Agateway Dr, Harvey, LA 70058, USA

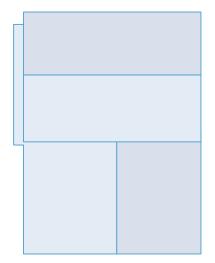



Measurements

Total Roof Area 2327 sqft **Total Roof Facets** 6 facets Predominant Pitch 4/12 Total Eaves 167ft 7in **Total Valleys** Oft Oin Oft Oin Total Hips **Total Ridges** 72ft 0in **Total Rakes** 126ft 6in Total Wall Flashing 23ft 6in Total Step Flashing 38ft 5in **Total Transition** Oft Oin Total Unspecified Oft Oin Hips + Ridges 72ft 0in

294ft 1in

Eaves + Rakes

Waste %	0%	10%	12%	15%	17%	20%	22%
Area (sqft)	2,327	2,560	2,607	2,677	2,723	2,793	2,839
Squares	23.3	25.6	26.1	26.8	27.3	28.0	28.4

We've calculated the waste percentages you might expect for this job. A number of factors are involved in determining which waste percentage to use including: how complex the roof is, and your roof application style. These numbers only include the roof area. You will also need to calculate the quantity of materials you will need for hips, valleys, ridges, and starter lengths This report was prepared by Roofr. Copyright © 2021 Roofr.com | All rights reserved.



Material Estimate

3821 Agateway Dr, Harvey, LA 70058, USA

3021 / tgateway 51, 11al vey, 11 (70030, 03)					
Product	Unit	Waste (0%)	Waste (10%)	Waste (15%)	Waste (20%)
Shingle (total sqft)		2,327 sqft	2,560 sqft	2,677 sqft	2,793 sqft
IKO - Cambridge	bundle	70	77	81	84
CertainTeed - Landmark	bundle	71	79	82	86
GAF - Timberline	bundle	71	79	82	86
Owens Corning - Duration	bundle	71	79	82	86
BP - Mystique	bundle	71	78	82	85
Starter (eaves + rakes)		295 ft	324 ft	339 ft	353 ft
IKO - Leading Edge Plus	bundle	3	3	3	3
CertainTeed - SwiftStart	bundle	3	3	3	4
GAF - Pro-Start	bundle	3	3	3	3
Owens Corning - Starter Strip	bundle	3	4	4	4
BP - Starter Strip	bundle	5	5	5	6
Ice and Water (eaves + valleys + flashings)		230 ft	253 ft	264 ft	276 ft
IKO - StormShield	roll	4	4	5	5
CertainTeed - WinterGuard	roll	4	4	5	5
GAF - WeatherWatch	roll	4	4	4	5
Owens Corning - WeatherLock	roll	4	4	4	4
BP - Weathertex	roll	4	4	5	5
Synthetic (total sqft; no laps)		2,327 sqft	2,560 sqft	2,677 sqft	2,793 sqft
IKO - Stormtite	roll	3	3	3	3
CertainTeed - RoofRunner	roll	3	3	3	3
GAF - Deck-Armor	roll	3	3	3	3
Owens Corning - RhinoRoof	roll	3	3	3	3
BP - PRODECK	roll	3	3	3	3
Capping (hips + ridges)		73 ft	80 ft	83 ft	87 ft
IKO - Hip and Ridge	bundle	2	3	3	3
CertainTeed - Shadow Ridge	bundle	2	2	2	2
GAF - Seal-A-Ridge	bundle	3	4	4	4
Owens Corning - DecoRidge	bundle	4	4	5	5
BP - Accu-Ridge	bundle	2	3	3	3
Other					
8' Valley (no laps)	sheet	0	0	0	0
10' Drip Edge (eaves + rakes; no laps)	sheet	30	33	34	36

These calculations are approximations and are not guaranteed. Always double check material orders quantities before using these calculations. The calculations are based off the the totals from the report and the final numbers are rounded to the hundredths of the unit.



